

150PzS-ET 2600 SOLAR

Vented Flooded Deep Cycle Battery



Performance characteristics

Nominal Voltage	2V
Number of cells	1
Design Life	20 years
Nominal Capacity 25°C (77°F)	
120 hour rate (22.5A, 1.85V)	2704Ah
48 hour rate (51.5A, 1.80V)	2474Ah
10 hour rate (212.4A, 1.8V)	2124Ah
Internal Resistance	
Fully Charged Battery 25°C (77°F)	0.17mOhm
Electrolyte	
Nominal S.G at 20°C = 1.240kg/l	
Operating Temperature Range	
	-20-55°C
Maximum Discharge Current 25°C (77°F)	
	2063A
Charge Methods: Constant Voltage Charge 25°C (77°F)	
Cycle use	2.40V (time limited)
Maximum charging current	850A
Standby use	2.25V ± 1%
Temperature compensation	-3.5mV/°C/Cell
Terminal Torque	
	23Nm

Features

- High energy density

- Robust tubular positive electrode design, compliant with DIN 40736

- Minimal maintenance due to low antimony alloy and large electrolyte volume

- Operating temperature -20°C to +55°C

- Low self discharge rate of approximately 3% per month at 20°C

- EUROBAT design life: Long Life >12 years

- Fully recyclable with low CO₂ footprint

- High cyclic performance

- 3000+ cycles @ 60% DOD @ IUI charging

Capacities C10-C240

Cell Type Ue (100%) / VPC	C10	C12	C20	C24	C48	C72	C100	C120	C240
Ref Temp	25°C	25°C	25°C	25°C	25°C	25°C	25°C	25°C	25°C

150PzS-ET 2600 SOLAR	2124	2148	2323	2393	2474	2614	2623	2704	2812
----------------------	------	------	------	------	------	------	------	------	------

Applications

- Solar/Wind Power Stations

- Traffic Systems


- Hydro Power Generation

- Off Grid Solutions

- Telecommunications/ Mobile Phone Stations

- Power Distribution Companies

Cycles vs DOD of OPzS Solar Power

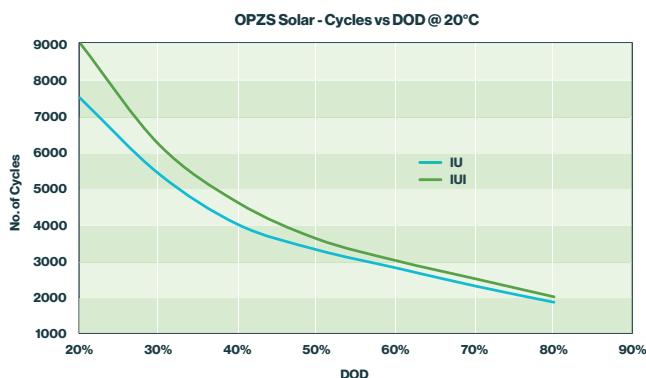

Dimensions and weight

Length	214 mm
Width	399 mm
Height (H1)	772 mm
Total height (H2)	785 mm
Dry weight	97.5kg
Filled weight	142.5 kg

