

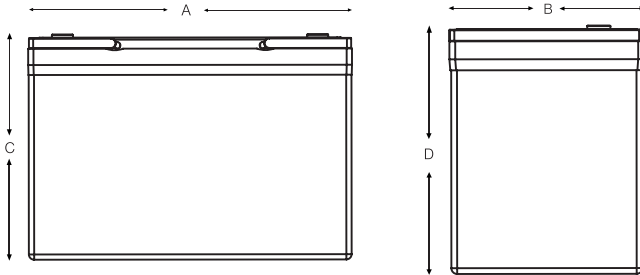


S06-12-092 (BCI27)

Gel Solar Bloc Battery



Left - Negative Right - Positive

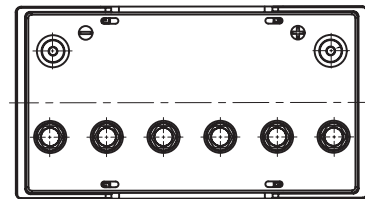

Electrical Specifications

C5 Capacity	78Ah
Voltage	12V
80% DOD Voltage Cutoff	5.6V
Self Discharge	Less than 3% per month (20°C/68°F)
Charge Temperature	Min: -10°C (14°F) / Max: 50°C (122°F)
Discharge Temperature**	Min: -40°C (-40°F) / Max: 50°C (122°F)
Storage	Min: -20°C (-4°F) / Max: 60°C (140°F)

Cell Type Ue (100%) / VPC Ref Temp	C100 1.80 25°C	C20 1.75 25°C	C10 1.75 25°C	C5 1.70 25°C
S06 12 092 (BCI27)	92	87	81	78

** CAUTION: Depths of discharge, operating voltages and currents, when designing systems for use at maximum temperatures, will vary.

Mechanical Specifications

Industry Reference	BCI27	
Length (A)	12.1in	307mm
Width (B)	6.6in	168mm
Height (C)	8.3in	211mm
Weight	70.5 lbs	32kgs
Terminal (Opt'l)	M8	
Cell(s)	3	
Electrolyte	Gel	
Terminal Torque Nm	8	

NOTE: There is a tolerance of +/-2%.

Terminal Options Available:

- M8
- A-Pole
- Dual
- Stud

Features

Maintenance-free bloc batteries in Gel technology (no topping up during lifetime)

Good high current performance for extreme operating conditions

High-class patented safety valve

1200 cycles (IEC 61427 / 60896-21/22)

Capacity: 6V 230Ah-300Ah(C₂₀)

Valve-regulated lead-acid battery

Recyclable

Long cycle life

Low self discharge rate allows for up to 2 years shelf life

Classified as a non-spillable battery is not restricted for transportation by:

- Air (IATA/ICAO provision 67)
- Ground (STB, DOT-CFR-HMR49)
- Water (IMDG amendment 27)

Applications

Solar

Home Inverter

Renewable Energy


Deep Cycle Applications

Charging profile


IU Charging I = min. 12% C₅ max. 18% C₅
U = 2.4 V per cell

IUI Charging I₁ = min. 12% C₅ max. 18% C₅
U = 2.35 V per cell
I₂ = 1.5% C₅ for max. 4 hours


Self discharge at different temperatures

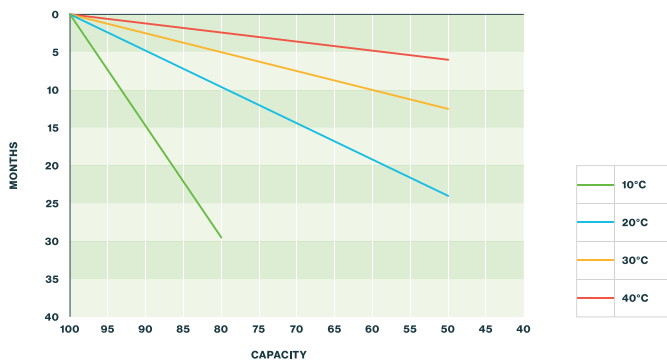


Capacity vs. temperature

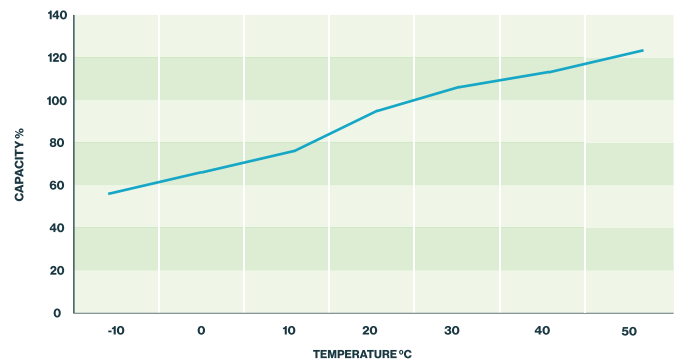

Storage: Determine the state of charge

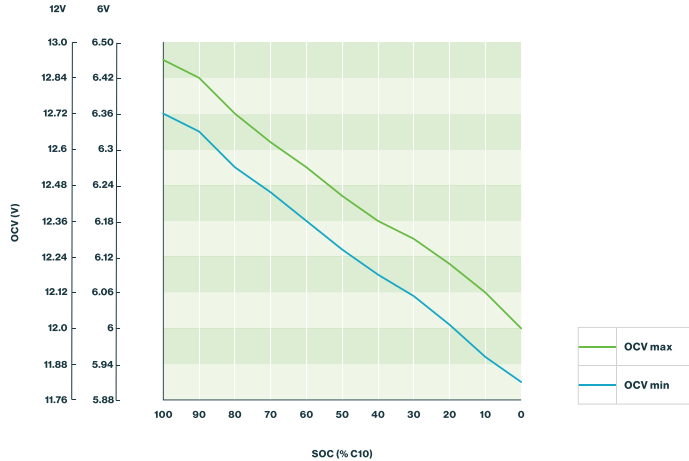

Cycle life vs. depth of discharge (25°C)

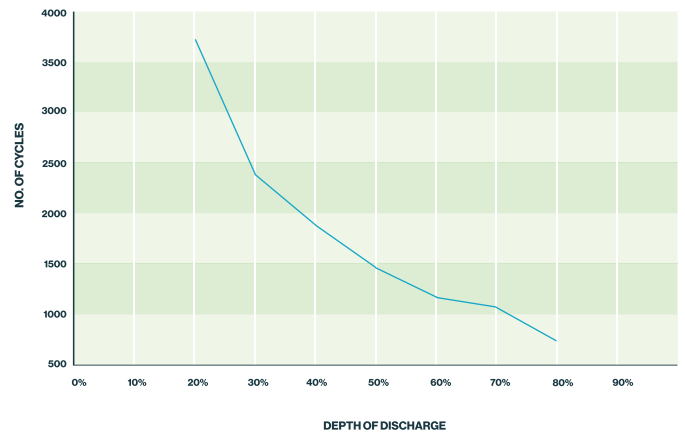

Relation between charging, voltage and temperature

