
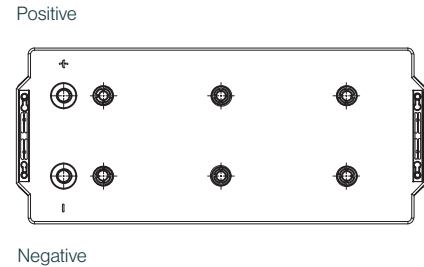


L06-12-150

Gel Leisure Bloc Battery

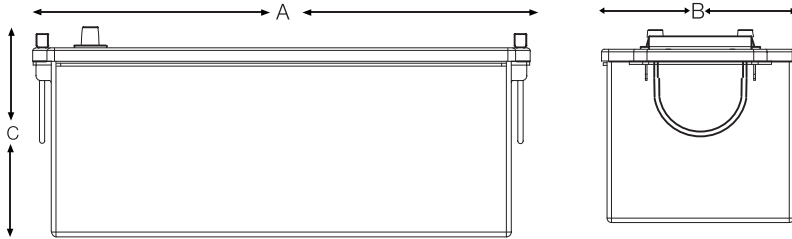

Electrical Specifications

Voltage	12V
80% DOD Voltage Cutoff	11.2V
Low Voltage Cutoff	10.8V
Self Discharge	Less than 3% per month (20°C/68°F)
Charge Temperature	Min: -10°C (14°F) / Max: 50°C (122°F)
Discharge Temperature**	Min: -40°C (-40°F) / Max: 50°C (122°F)
Storage	Min: -20°C (-4°F) / Max: 60°C (140°F)

Cell Type Ue (100%) / VPC Ref Temp	C100 1.80 25°C	C72 1.80 25°C	C20 1.75 25°C	C10 1.75 25°C	C5 1.70 25°C	C3 1.70 25°C
L06 12 150	170	164	159	150	132	123

** CAUTION: Depths of discharge, operating voltages and currents, when designing systems for use at maximum temperatures, will vary.

Mechanical Specifications

Industry Reference	DIN B / BCI 4D (Reverse Polarity)	
Length (A)	20.2 in	513 mm
Width (B)	8.9 in	223 mm
Height (C)	7.7 in	196 mm
Weight	119 lbs	54 kgs
Terminal (Opt'l)*	A-Pole	
Cell(s)	6	
Electrolyte	Gel	
Terminal Torque Nm	n/a	

NOTE: There is a tolerance of +/-2%.

Terminal Options Available:

- M8
- A-Pole
- Dual
- Stud

Features

Maintenance-free bloc batteries in Gel technology (no topping up during lifetime)

Good high current performance for extreme operating conditions

High-class patented safety valve

700 cycles (DIN EN 60254-1 & IEC 254-1)

Capacity: 12V 56Ah - 210 Ah (C₂₀)

Valve-regulated lead-acid battery

Recyclable

Long cycle life

Low self discharge rate allows for up to 2 years shelf life

Classified as a non-spillable battery is not restricted for transportation by:

- Air (IATA/ICAO provision 67)
- Ground (STB, DOT-CFR-HMR49)
- Water (IMDG amendment 27)

Applications

Caravans

Motorhomes

Maritime

& other leisure applications

Charging profile


IU Charging I = min. 12% C₅ max. 18% C₅
U = 2.4 V per cell

IUI Charging I₁ = min. 12% C₅ max. 18% C₅
U = 2.35 V per cell
I₂ = 1.5% C₅ for max. 4 hours


Torque




Self discharge at different temperatures

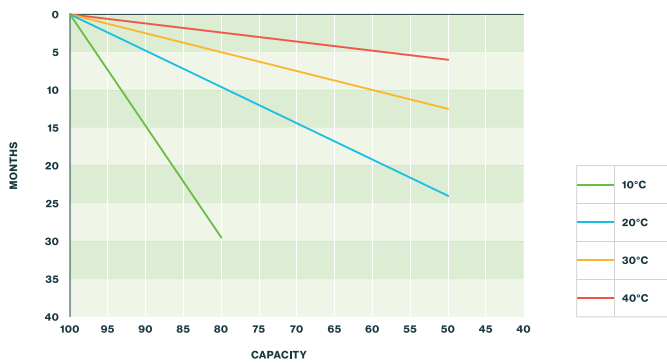


Capacity vs. temperature

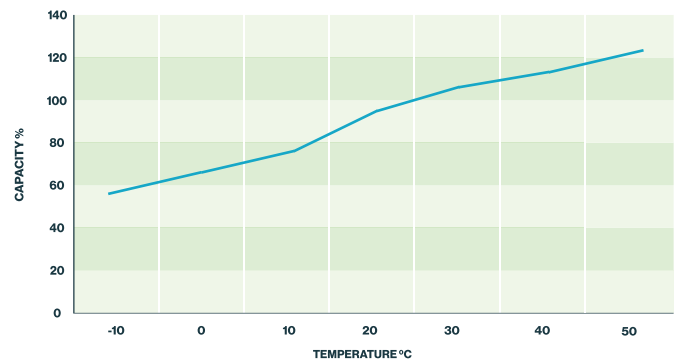

Storage: Determine the state of charge

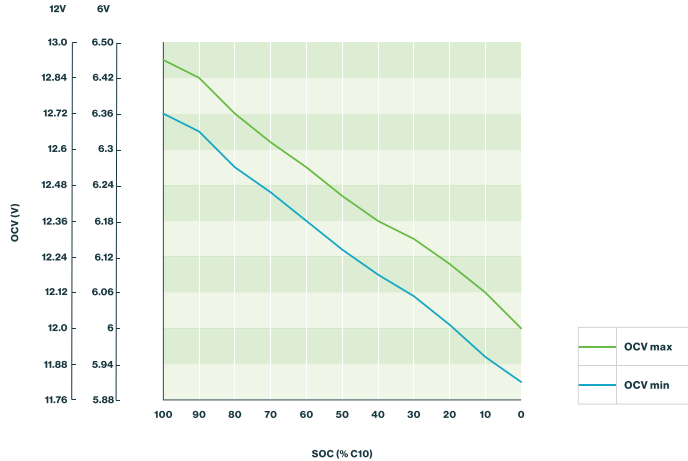

Cycle life vs. depth of discharge (25°C)

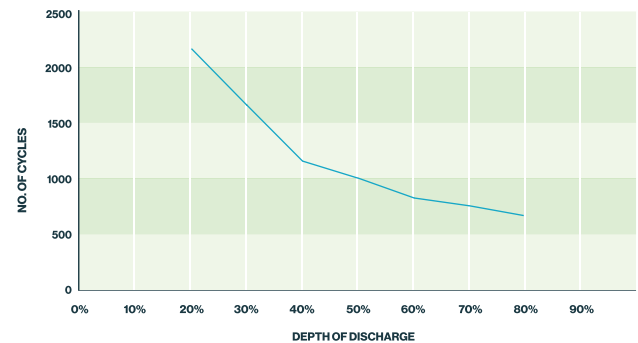

Relation between charging, voltage and temperature

