

130PzS-ET 2250 SOLAR

Vented Flooded Deep Cycle Battery



Performance characteristics

Nominal Voltage	2V
Number of cells	1
Design Life	20 years
Nominal Capacity 25°C (77°F)	
120 hour rate (19.5A, 1.85V)	2343Ah
48 hour rate (44.7A, 1.80V)	2144Ah
10 hour rate (184A, 1.8V)	1841Ah
Internal Resistance	
Fully Charged Battery 25°C (77°F)	0.22mOhm
Electrolyte	
Nominal S.G at 20°C = 1.240kg/l	
Operating Temperature Range	-20-55°C
Maximum Discharge Current 20°C (68°F)	1736A
Charge Methods: Constant Voltage Charge 20°C (68°F)	
Cycle use	2.40V (time limited)
Maximum charging current	736A
Standby use	2.25V ± 1%
Temperature compensation	-3.5mV/°C/Cell
Terminal Torque	23Nm

Features

- High energy density

- Robust tubular positive electrode design, compliant with DIN 40736

- Minimal maintenance due to low antimony alloy and large electrolyte volume

- Operating temperature -20°C to +55°C

- Low self discharge rate of approximately 3% per month at 20°C

- EUROBAT design life: Long Life >12 years

- Fully recyclable with low CO₂ footprint

- High cyclic performance

- 3000+ cycles @ 60% DOD @ IUI charging

Capacities C10-C240

Cell Type Ue (100%) / VPC	C10	C12	C20	C24	C48	C72	C100	C120	C240
Ref Temp	25°C	25°C	25°C	25°C	25°C	25°C	25°C	25°C	25°C

130PzS-ET 2250 SOLAR	1841	1861	2014	2074	2144	2266	2273	2343	2437
----------------------	------	------	------	------	------	------	------	------	------

Applications

- Solar/Wind Power Stations

- Traffic Systems


- Hydro Power Generation

- Off Grid Solutions

- Telecommunications/ Mobile Phone Stations

- Power Distribution Companies

Cycles vs DOD of OPzS Solar Power

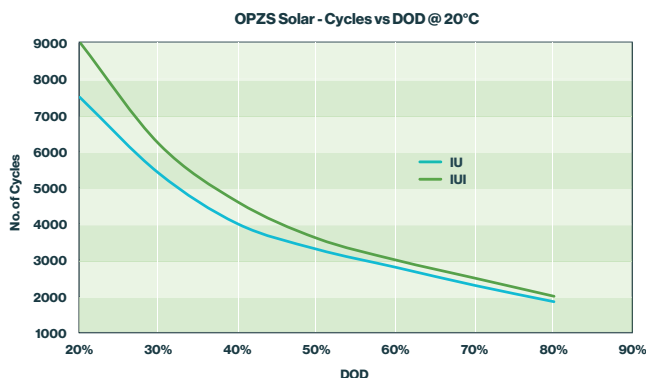

Dimensions and weight

Length	210mm
Width	275 mm
Height (H1)	797mm
Total height (H2)	810 mm
Dry weight	82.0 kg
Filled weight	110.9 kg

