

2 OPzS-ET 160 SOLAR

Vented Flooded Deep Cycle Battery



Performance characteristics


Nominal Voltage	2V
Number of cells	1
Design Life	20 years
Nominal Capacity 25°C (77°F)	
120 hour rate (1.4A, 1.8V)	163Ah
48 hour rate (3A, 1.8V)	144Ah
10 hour rate (11.6A, 1.8V)	116Ah
Internal Resistance	
Fully Charged Battery 25°C (77°F)	0.95mOhm
Electrolyte	
Nominal S.G at 20°C = 1.240kg/l	
Operating Temperature Range	-20-55°C
Maximum Discharge Current 25°C (77°F)	192A
Charge Methods: Constant Voltage Charge 25°C (77°F)	
Cycle use	2.40V (time limited)
Maximum charging current	46.4A
Standby use	2.25V ± 1%
Temperature compensation	-3.5mV/°C/Cell
Terminal Torque	23Nm

Capacities C10-C240

Cell Type Ue (100%) / VPC	C10	C12	C20	C24	C48	C72	C100	C120	C240
Ref Temp	25°C	25°C	25°C	25°C	25°C	25°C	25°C	25°C	25°C

2OPzS-ET 160 SOLAR	116	117	128	134	144	152	158	163	169
--------------------	-----	-----	-----	-----	-----	-----	-----	-----	-----

Cycles vs DOD of OPzS Solar Power

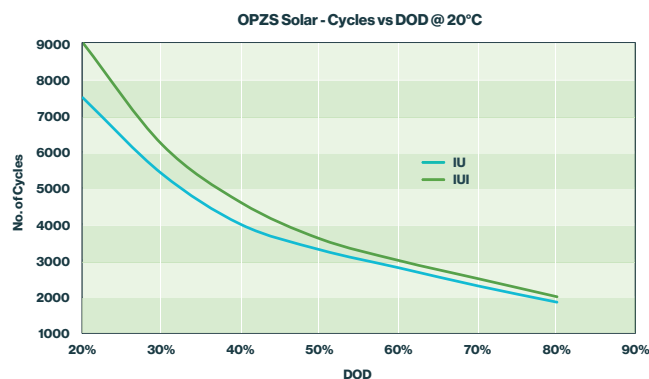

ET/DATAOPZSSOLAR160V10922

Compliant with IEC 60896-11 / IEC 61427

Features

High energy density
Robust tubular positive electrode design, compliant with DIN 40736
Minimal maintenance due to low antimony alloy and large electrolyte volume
Operating temperature -20°C to +55°C
Low self discharge rate of approximately 3% per month at 20°C
EUROBAT design life: Long Life >12 years
Fully recyclable with low CO ₂ footprint
High cyclic performance
3000+ cycles @ 60% DOD @ IUI charging

Applications

Solar/Wind Power Stations
Traffic Systems
Hydro Power Generation
Off Grid Solutions
Telecommunications/ Mobile Phone Stations
Power Distribution Companies

Dimensions and weight

Length	103 mm
Width	206 mm
Height (H1)	355 mm
Total height (H2)	368 mm
Dry weight	8.3kg
Filled weight	13.3 kg

