
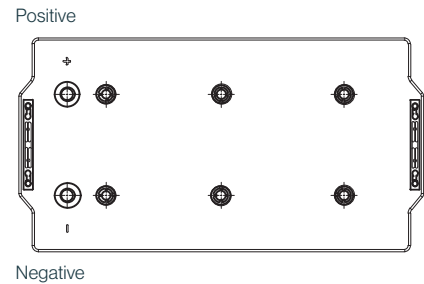


# L06-12-210

## Gel Leisure Bloc Battery

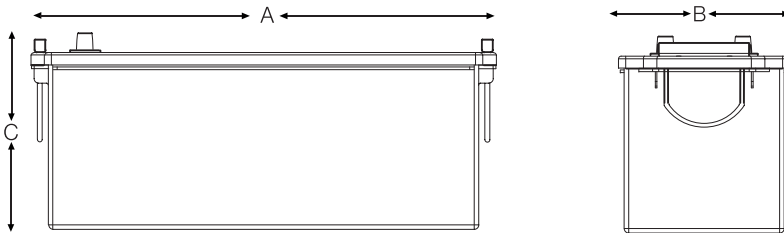

### Electrical Specifications

<b>Voltage</b>	12V
<b>80% DOD Voltage Cutoff</b>	11.2V
<b>Low Voltage Cutoff</b>	10.8V
<b>Self Discharge</b>	Less than 3% per month (20°C/68°F)
<b>Charge Temperature</b>	Min: -10°C (14°F) / Max: 50°C (122°F)
<b>Discharge Temperature**</b>	Min: -40°C (-40°F) / Max: 50°C (122°F)
<b>Storage</b>	Min: -20°C (-4°F) / Max: 60°C (140°F)

### Features

Maintenance-free bloc batteries in Gel technology (no topping up during lifetime)

Good high current performance for extreme operating conditions

High-class patented safety valve

700 cycles (DIN EN 60254-1 & IEC 254-1)

Capacity: 12V 56Ah - 210 Ah (C<sub>20</sub>)

Valve-regulated lead-acid battery

Recyclable

Long cycle life

Low self discharge rate allows for up to 2 years shelf life

Classified as a non-spillable battery is not restricted for transportation by:

- Air (IATA/ICAO provision 67)
- Ground (STB, DOT-CFR-HMR49)
- Water (IMDG amendment 27)

### Applications

Caravans

Motorhomes

Maritime

& other leisure applications

Cell Type Ue (100%) / VPC	C100	C72	C20	C10	C5	C3
Ref Temp	1.80	1.80	1.75	1.75	1.70	1.70
	25°C	25°C	25°C	25°C	25°C	25°C
L06 12 210	230	221	212	200	177	166

\*\* CAUTION: Depths of discharge, operating voltages and currents, when designing systems for use at maximum temperatures, will vary.

### Mechanical Specifications

Industry Reference	DIN C / BCI 8D (Reverse polarity)	
<b>Length (A)</b>	20.4 in	518mm
<b>Width (B)</b>	10.8 in	274 mm
<b>Height (C)</b>	8.5 in	215 mm
<b>Weight</b>	150 lbs	68 kgs
<b>Terminal (Opt'l)*</b>	A-Pole	
<b>Cell(s)</b>	6	
<b>Electrolyte</b>	Gel	
<b>Terminal Torque Nm</b>	n/a	

NOTE: There is a tolerance of +/-2%.

### Terminal Options Available:

- M8
- A-Pole
- Dual
- Stud

## Charging profile


**IU Charging** I = min. 12% C<sub>5</sub> max. 18% C<sub>5</sub>  
U = 2.4 V per cell

**IUI Charging** I<sub>1</sub> = min. 12% C<sub>5</sub> max. 18% C<sub>5</sub>  
U = 2.35 V per cell  
I<sub>2</sub> = 1.5% C<sub>5</sub> for max. 4 hours


## Torque




## Self discharge at different temperatures

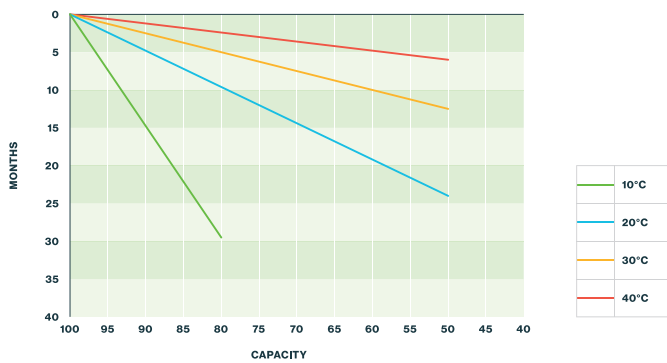


## Capacity vs. temperature

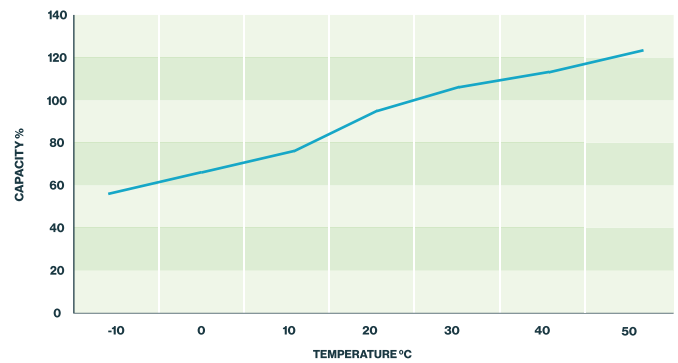

## Storage: Determine the state of charge

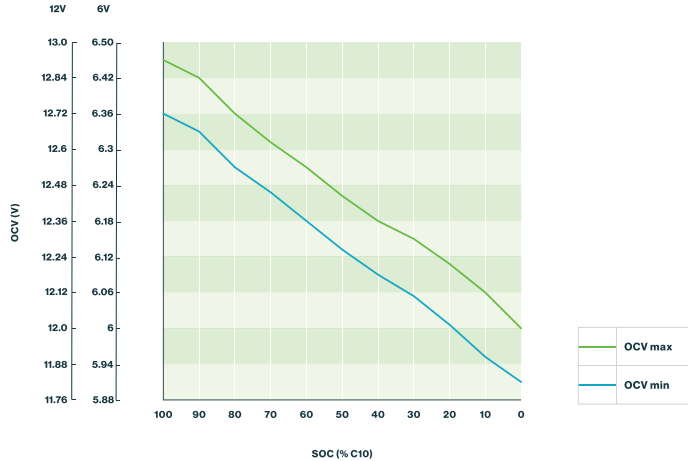

## Cycle life vs. depth of discharge (25°C)

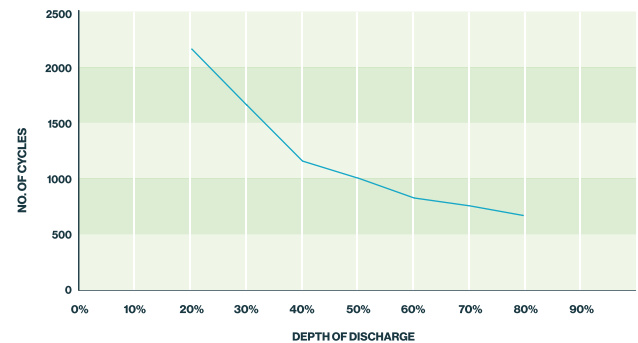

## Relation between charging, voltage and temperature

